


Mortising unit chain

FRAMAR -mc 30

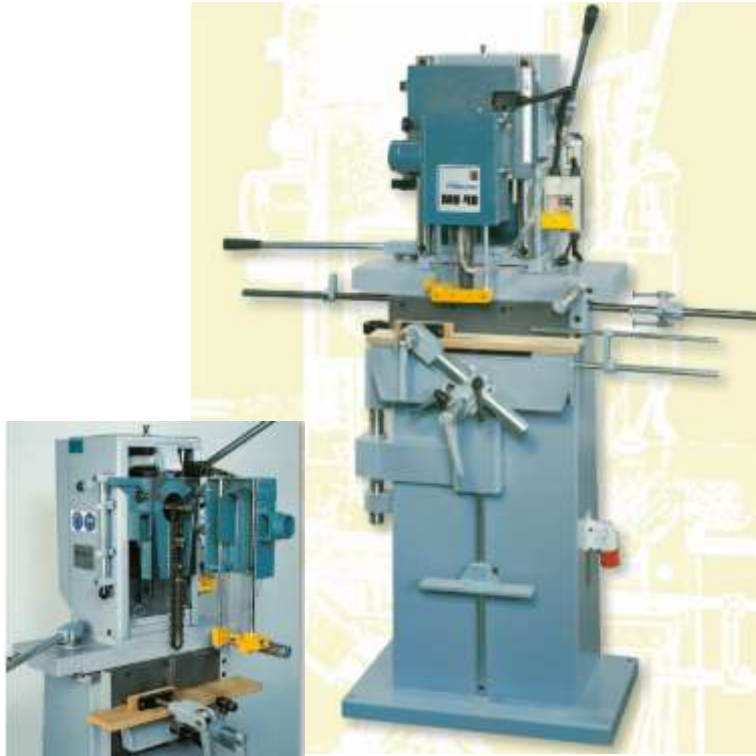

Description

Machine designed for the joinery. It may carry out mortises on amounts for windows and doors with different lengths and depths. The sliding of the head operator has place on the round guides corrected with the help of bushes of self-lubricating precision and self-cleaning scrapers, which gives it great strength and precision in the work with minimum effort. The machine allows the tilt of the Working Table and the rotation of the

-
-
- head, with lubrication pump, a device to security on the control lever.
A group firewall chips and opening chip suction. Equipped with stops at revolver on the longitudinal carriage, judgments of depth of the vertical travel of the head
-



Mortising unit chain

Technical characteristics

Max Height of door	900 mm
Cross race of the head	180 mm
Vertical Travel of the head	180 mm
Longitudinal race of the head	200 mm
Vertical Travel of the table	160mm
Tilt of the table	+/- 45 degree
Engine Power	2(1.5) cv/ KW
Speed of rotation	2800 rpm
Dimension of the work table	540x110 mm
Rotation of the head	+/- 45 degree
Weight	210 kg